



Test Report: NSP-750-24

750W AC/DC High Reliable Multi-Industries Enclosed
Type Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test



E.M.C. Test


■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

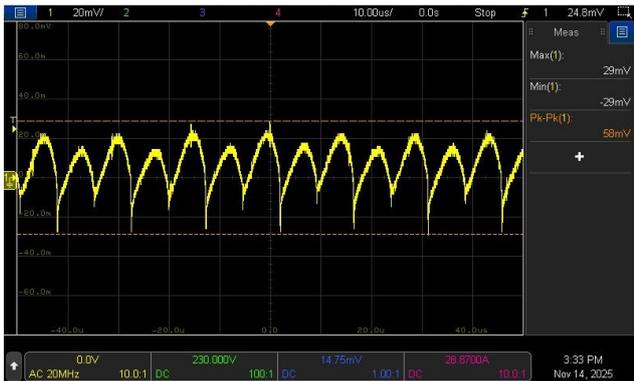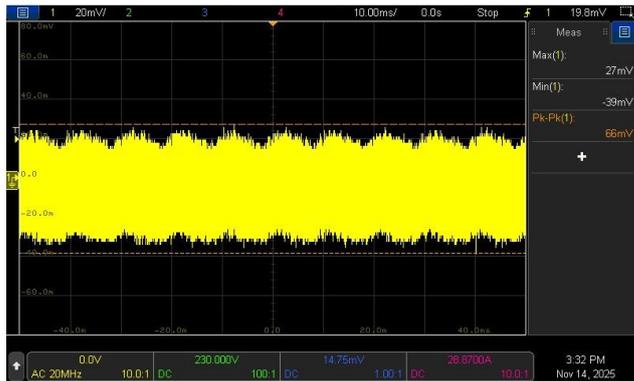NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21V~26V	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	20.33V~26.74V/277VAC 20.34V~26.74V/230VAC 20.34V~26.74V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 85VAC~305VAC O/P:FULL~MIN. LOAD Ta:25°C	V1: -0.04% ~ 0%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: -0.0042% ~ 0.0083%
4	LOAD REGULATION	V1: -0.5% ~ +0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.0208% ~ 0.0125%
5	OVER/UNDERSHOOT TEST	<± 5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD Ta:25°C	0.75%
6	RIPPLE & NOISE (Max)	V1: 240mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	58mVp-p / high frequency 66mVp-p / low frequency
		high frequency :	low frequency :	
				
7	SET UP TIME(Max)	277VAC/900ms 230VAC/1000ms 115VAC/1500ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/359.7ms 230VAC/422.8ms 115VAC/847ms
		INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage	INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage	

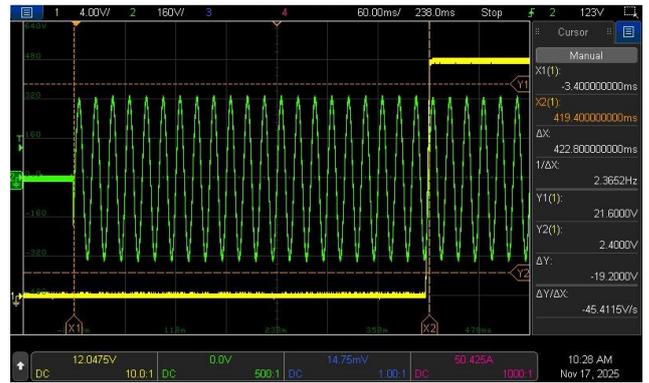

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage CH2: AC Input Voltage



8 RISE TIME (Max)


277VAC/80ms
230VAC/80ms
115VAC/80ms

I/P : 277 VAC
I/P : 230 VAC
I/P : 115 VAC
O/P : FULL LOAD
Ta : 25°C

277VAC/4ms
230VAC/4.02ms
115VAC/3.92ms

INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage

INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage

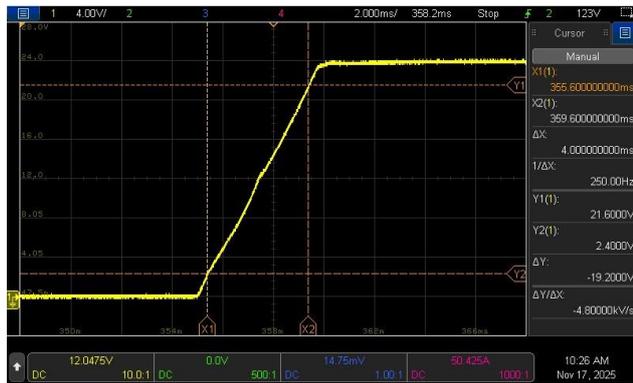

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage




9	HOLD UP TIME (Typ.)	277VAC/16ms	I/P : 277 VAC	277VAC/24.94ms
		230VAC/16ms	I/P : 230 VAC	230VAC/24.98ms
		115VAC/16ms	I/P : 115 VAC	115VAC/24.22ms
			O/P : FULL LOAD	
			Ta : 25°C	


INPUT=277VAC/50HZ @ FULL LOAD
CH1: Output Voltage CH2: AC Input Voltage



INPUT=230VAC/50HZ @ FULL LOAD
CH1: Output Voltage CH2: AC Input Voltage

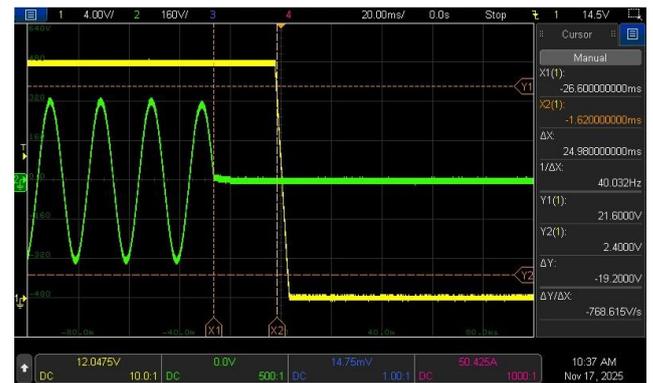

INPUT=115VAC/60HZ @ FULL LOAD
CH1: Output Voltage CH2: AC Input Voltage

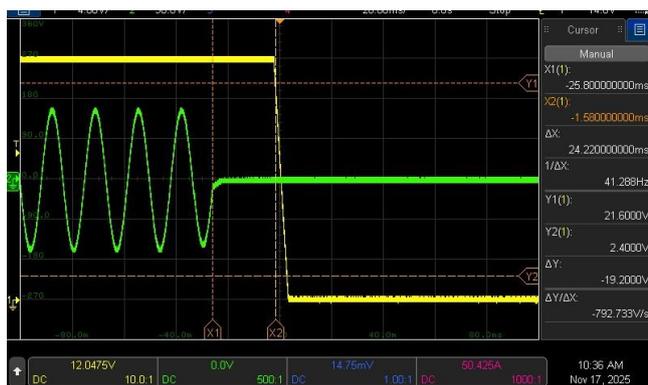

10	DYNAMIC LOAD	V1: 2400mVp-p	I/P: 230VAC	1630mVp-p
			O/P:	611mVp-p
			(1) FULL/ MIN LOAD 50%DUTY / 120HZ	
			(2) FULL/ MIN LOAD 50%DUTY / 1KHZ	
			Ta:25°C	


	FULL / MIN LOAD 50%DUTY / 120HZ		FULL / MIN LOAD 50%DUTY / 1KHZ	
11	TRANSIENT RECOVERY TIME	V1: 240mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	239mVp-p

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT			
1	INPUT VOLTAGE RANGE	85VAC~305VAC 120VDC~ 431VDC LOAD (%) vs INPUT VOLTAGE (Vac) 60Hz	(1) I/P: TESTING O/P: FULL / 80% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 80% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 80% LOAD Ta:25°C I/P: HIGH-LINE+10V=315V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 80V~305V/ FULL LOAD 80V~305V/ 80% LOAD (2)108.6 Vdc~431Vdc/FULL LOAD 108.6Vdc~431Vdc/80% LOAD (3) 108.6Vdc~431Vdc/FULL LOAD 108.6Vdc~431Vdc/80% LOAD TEST: OK			
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC~ 305VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK			
3	INPUT CURRENT (Typ.)	277V/ 3.2 A 230V/ 3.9 A 115V/ 8.2 A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =2.9A/ 277VAC I =3.48A/ 230VAC I =7.26A/ 115VAC			
4	LEAKAGE CURRENT	Earth leakage current < 350uA (rms)@277Vac; touch current<100uA(rms) @ 277Vac;	I/P : 277 VAC/60HZ O/P : Min LOAD Ta : 25°C	For Earth : 228.3uA For touch : 28.9uA			
5	NO LOAD CONSUMPTION	Remote Power OFF: 0.75W/115Vac 0.75W/230Vac 1W/277Vac	I/P : 115VAC I/P : 230VAC I/P : 277VAC O/P : NO LOAD	TEST: <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td></td> <td>Remote Power OFF</td> <td>Remote Power ON</td> </tr> </table>		Remote Power OFF	Remote Power ON
	Remote Power OFF	Remote Power ON					



		Remote Power ON: 5W/115Vac 5W/230Vac 5W/277Vac	Ta : 25°C	<table border="1"> <tr> <td>115VAC</td> <td>0.356W</td> <td>3.834W</td> </tr> <tr> <td>230VAC</td> <td>0.459W</td> <td>3.549W</td> </tr> <tr> <td>277VAC</td> <td>0.553W</td> <td>3.328W</td> </tr> </table>	115VAC	0.356W	3.834W	230VAC	0.459W	3.549W	277VAC	0.553W	3.328W																																			
115VAC	0.356W	3.834W																																														
230VAC	0.459W	3.549W																																														
277VAC	0.553W	3.328W																																														
6	POWER FACTOR (Typ.)	0.90/ 277VAC 0.93/ 230VAC 0.98/115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.979/277VAC PF=0.988/230VAC PF=0.997/115VAC																																												
<p>P.F vs LOAD</p> <table border="1"> <caption>Power Factor vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC PF</th> <th>230VAC PF</th> <th>277VAC PF</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.95</td><td>0.75</td><td>0.60</td></tr> <tr><td>20%</td><td>0.97</td><td>0.89</td><td>0.77</td></tr> <tr><td>30%</td><td>0.98</td><td>0.93</td><td>0.86</td></tr> <tr><td>40%</td><td>0.99</td><td>0.95</td><td>0.90</td></tr> <tr><td>50%</td><td>0.99</td><td>0.96</td><td>0.92</td></tr> <tr><td>60%</td><td>0.99</td><td>0.97</td><td>0.94</td></tr> <tr><td>70%</td><td>0.99</td><td>0.97</td><td>0.95</td></tr> <tr><td>80%</td><td>0.99</td><td>0.97</td><td>0.96</td></tr> <tr><td>90%</td><td>0.99</td><td>0.97</td><td>0.96</td></tr> <tr><td>100%</td><td>0.99</td><td>0.97</td><td>0.96</td></tr> </tbody> </table>					LOAD (%)	115VAC PF	230VAC PF	277VAC PF	10%	0.95	0.75	0.60	20%	0.97	0.89	0.77	30%	0.98	0.93	0.86	40%	0.99	0.95	0.90	50%	0.99	0.96	0.92	60%	0.99	0.97	0.94	70%	0.99	0.97	0.95	80%	0.99	0.97	0.96	90%	0.99	0.97	0.96	100%	0.99	0.97	0.96
LOAD (%)	115VAC PF	230VAC PF	277VAC PF																																													
10%	0.95	0.75	0.60																																													
20%	0.97	0.89	0.77																																													
30%	0.98	0.93	0.86																																													
40%	0.99	0.95	0.90																																													
50%	0.99	0.96	0.92																																													
60%	0.99	0.97	0.94																																													
70%	0.99	0.97	0.95																																													
80%	0.99	0.97	0.96																																													
90%	0.99	0.97	0.96																																													
100%	0.99	0.97	0.96																																													
7	EFFICIENCY(Typ.)	94%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	94.87 %																																												
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC Efficiency (%)</th> <th>230VAC Efficiency (%)</th> <th>277VAC Efficiency (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>88</td><td>89</td><td>90</td></tr> <tr><td>20%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>30%</td><td>93</td><td>94</td><td>95</td></tr> <tr><td>40%</td><td>93</td><td>94</td><td>95</td></tr> <tr><td>50%</td><td>93</td><td>94</td><td>95</td></tr> <tr><td>60%</td><td>93</td><td>94</td><td>95</td></tr> <tr><td>70%</td><td>93</td><td>94</td><td>95</td></tr> <tr><td>80%</td><td>92</td><td>94</td><td>95</td></tr> <tr><td>90%</td><td>92</td><td>94</td><td>95</td></tr> <tr><td>100%</td><td>92</td><td>94</td><td>95</td></tr> </tbody> </table>					LOAD (%)	115VAC Efficiency (%)	230VAC Efficiency (%)	277VAC Efficiency (%)	10%	88	89	90	20%	92	93	94	30%	93	94	95	40%	93	94	95	50%	93	94	95	60%	93	94	95	70%	93	94	95	80%	92	94	95	90%	92	94	95	100%	92	94	95
LOAD (%)	115VAC Efficiency (%)	230VAC Efficiency (%)	277VAC Efficiency (%)																																													
10%	88	89	90																																													
20%	92	93	94																																													
30%	93	94	95																																													
40%	93	94	95																																													
50%	93	94	95																																													
60%	93	94	95																																													
70%	93	94	95																																													
80%	92	94	95																																													
90%	92	94	95																																													
100%	92	94	95																																													
8	INRUSH CURRENT(Typ.)	277V/50A 230V/40A 115V/20A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =39.3A/ 277VAC I =28.9A/ 230VAC I =15.6A/ 115VAC T50= 1450us/230V																																												

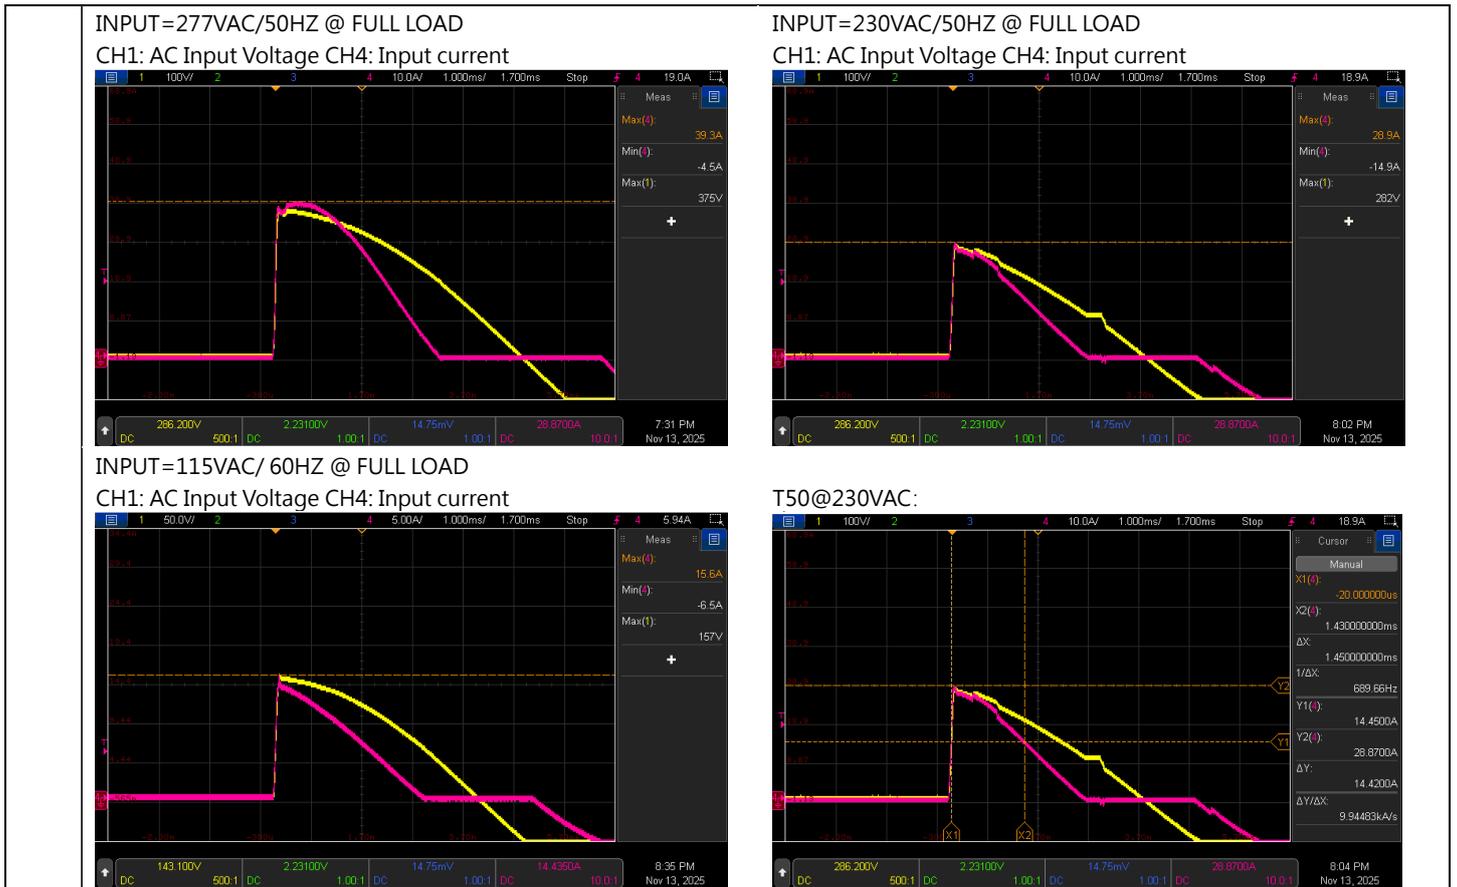

PROTECTION FUNCTION TEST



NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	<p>Protection type: Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown($V_{out} > 30\%$), recovers automatically after fault condition is removed, or shut down o/p voltage when $V_{out} < 30\%$, AC re-power on to recover.</p> <p>Protection type: >200% rated power, constant current limiting ($V_{out} > 30\%$)with auto-recovery after fault condition is removed, or shut down o/p voltage when $V_{out} < 30\%$, AC re-power on to recover.</p>	<p>I/P: 305VAC I/P: 230VAC I/P: 180VAC I/P: 100VAC O/P: TESTING $T_a: 25^{\circ}\text{C}$</p>	<p>TEST :</p> <p>115.34%/305VAC, ; 115.34%/230VAC, 115.34%/100VAC,</p> <p>Protection type: Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown($V_{out} > 30\%$), recovers automatically after fault condition is removed, or shut down o/p voltage when $V_{out} < 30\%$, AC re-power on to recover.</p> <p><u>217.57</u> %/305VAC <u>217.89</u> %/180VAC <u>198.72</u> %/100VAC</p> <p>Protection type:</p>



				>200% rated power, constant current limiting (Vout>30%)with auto-recovery after fault condition is removed, or shut down o/p voltage when Vout<30%,AC re-power on to recover.
2	OVER VOLTAGE PROTECTION	28V~ 36V Protection type: Shut down o/p voltage, AC re-power on to recover	I/P: 305VAC I/P: 85VAC O/P:MIN LOAD Ta:25°C	32.5V/ 305VAC 32.7V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, AC re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	TEST : <u>OK</u> O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover or Hiccup mode ,recovery automatically after fault conditon is removed. Depends on the user's wire impedance	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	NO DAMAGE PROTECTION TYPE : Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover or Hiccup mode, recovery automatically after fault conditon is removed. Depends on the user's wire impedance.

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT						
1	AUXILIARY POWER (AUX)	1. 5Vaux @ 0.2A, Tolerance -15% ~ +15% at main output 20% rated current; 2. 12Vaux @ 0.8A, Tolerance -15% ~ +15% at main output 20% rated current. I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result : <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>AUX</th> <th>TOLERANCE</th> </tr> </thead> <tbody> <tr> <td>5V / 0.2A</td> <td>-0.46% ~ 0%</td> </tr> <tr> <td>12V / 0.8A</td> <td>-0.21% ~ 0%</td> </tr> </tbody> </table>	AUX	TOLERANCE	5V / 0.2A	-0.46% ~ 0%	12V / 0.8A	-0.21% ~ 0%		
AUX	TOLERANCE									
5V / 0.2A	-0.46% ~ 0%									
12V / 0.8A	-0.21% ~ 0%									

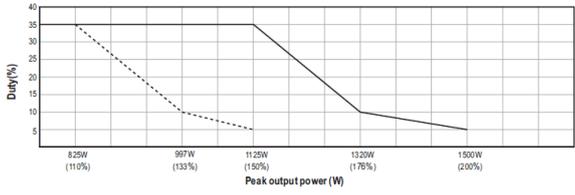2	REMOTE CONTROL	Power ON: Short between Pin11 & Pin13 on CN1 Power OFF: open between Pin11 & Pin13 on CN1	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
3	REMOTE SENSE	S+ / S- Compensate voltage drop on the load wiring up to 0.3V.	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
4	DC OK SIGNAL	15Vdc/10mA resistive load 	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
5	FAN CONTROL	(1)Fan ON/OFF control: RTH3 ≥ 50°C ± 10°C FAN ON RTH3 ≤ 40°C ± 10°C FAN OFF	I/P:230VAC O/P:TESTING	TEST: (1) <u>OK</u> (2) <u>44.6</u> dB Ta:25°C
6	PEAK Power	I/P: 100/305VAC O/P:  -----100VAC ————200VAC		TEST: <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/Q3 : Rated: 600V/40A	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/	Q2 Q3 VDS: VDS: (1) 491V (1) 484V (2) 523V (2) 516V (3) 488V (3) 482V (4) 488V (4) 482V (5) 488V (5) 482V (6) 491V (6) 482V (7) 491V (7) 486V (8) 491V (8) 486V



			Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 : Rated: 650V/46A	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q1 VDS: (1) 566V (2) 562V (3) 564V (4) 568V (5) 564V (6) 564V (7) 564V (8) 568V
3	P.F.C DIODE	D5 : Rated: 60A/650V	I/P: High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 476V (2) 465V (3) 469V (4) 472V (5) 469V
4	Diode Peak Voltage	Q100 / Q104 : Rated: 100V/136A	AC ON/OFF I/P: High-Line +3V =308 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load <u>VO=Vnormal</u> O/P: (1) Full Load Ta:25°C	Q100: Q104: <u>VO=Vomax</u> <u>VO=Vomax</u> VDS: VDS: (1) 62.6V (1) 62.1V (2) 61.8V (2) 61.2V (3) 62.6V (3) 62.5V (4) 62.5V (4) 62.1V (5) 62.5V (5) 62.1V (6) 62.5V (6) 62.5V (7) 59.9V (7) 59V (8) 59.5V (8) 60.8V (9) 64.8V (9) 64.8V <u>VO=Vnormal</u> <u>VO=Vnormal</u> (1) 58.9V (1) 59.4V



5	AUX Transistor (D to S) or (C to E) Peak Voltage	Q4 : Rated:700V/10.5A	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	VDS: (1) 581V (2) 591V (3) 586V (4) 591V (5) 586V (6) 596V (7) 562V (8) 596V
6	AUX Clamp Diode Peak Voltage	D15 : Rated : 1A/1000 V	AC ON/OFF I/P : High-Line +3V = 308V O/P : (1) Dynamic Load 90%Duty/1KHz (2) Full load continue Ta : 25°C	(1) 581V (2) 533V
7	AUX Diode Peak Voltage	D18 : Rated : 2A/200 V	AC ON/OFF I/P: High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load Ta:25°C	D18: VDS: (1) 124V (2) 119V (3) 124V (4) 125V (5) 125V (6) 127V (7) 118V (8) 126V (9) 124V D124: VDS: (1) 76.4V (2) 73.2V (3) 76.4V (4) 76.4V (5) 76.4V (6) 78.0V (7) 72.4V (8) 77.2V (9) 76.4V
8	Input Capacitor Voltage	C5 : Rated: 100u/450V	I/P: High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /off (3) Full Load /Min load Change (4) Full load continue (5) Peak Load on/off (6) Peak Load continue Ta:25°C	(1) 447V (2) 443V (3) 443V (4) 441V (5) 447V (6) 441V
9	Control IC Voltage Test	PWM IC U1 : Rated : 12.5V~ 27.9V	AC ON/OFF I/P: High-Line +3V =308V	U1 (1) 14.8V (2) 14.9V U101 (1) 11.29V (2) 12.47V

	<p>PFC IC U2: Rated: 12.9V~25V</p> <p>IC U9: Rated: 3.1V~17V</p> <p>O/P IC U101: Rated: 4.75V~38V</p> <p>IC U103: Rated : 3~30 V</p> <p>IC U104 : Rated : 4.5V ~36V</p> <p>AUX IC U7 : Rated : 8V~26.5V</p>	<p>O/P: (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (Low Line)</p> <p>Ta:25°C</p>	<p>(3) 14.8V (4) 14.8V (5) 14.8V</p> <p>U2 (1) 14V (2) 14.2V (3) 14V (4) 14V (5) 14V</p> <p>U9 (1) 14V (2) 14.2V (3) 14V (4) 14V (5) 14V</p>	<p>(3) 11.29V (4) 11.29V (5) 11.29V</p> <p>U103/U104 (1) 11.34V (2) 11.34V (3) 11.34V (4) 11.34V (5) 11.34V</p> <p>U7 (1) 19.1V (2) 18.9V (3) 18.9V (4) 18.5V (5) 18.5V</p>
--	---	--	--	---

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.2 K VAC/min I/P-FG : 2 K VAC/min O/P-FG: 1.5 KVAC/min	I/P-O/P: 4.62 KVAC/min I/P-FG: 2.52 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 2.33 mA I/P - F G : 2.77 mA O/P - F G : 1.57 m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500 VDC>100MΩ I/P-FG: 500 VDC>100MΩ O/P-FG: 500 VDC >100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 50 GΩ I/P - F G : 50 GΩ O/P - F G : 50 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	10mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 (IEC61000-3-2) ■ CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ PASS
2	CONDUCTION	BS EN/EN55032(CISPR32), CNS 15936 CLASS B BS EN/EN55011 (CISPR11) CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab



NO	Position	ROOM AMBIENT Ta=26.8°C	HIGH AMBIENT Ta=60.1°C
17	C2	33.2°C	67.1°C
18	BD1	55.4°C	88.0°C
19	C16	38.4°C	72.2°C
20	RTH1	36.1°C	69.5°C
21	RY1	39.4°C	72.6°C
22	RTH4	45.5°C	79.0°C
23	L1	50.5°C	84.0°C
24	Q1	45.9°C	79.6°C
25	D5	44.4°C	78.2°C
26	C5	35.4°C	69.0°C
27	D6	41.7°C	75.6°C
28	U1	47.3°C	82.0°C
29	C7	43.4°C	77.7°C
30	Q3	46.7°C	81.9°C
31	Q2	49.2°C	84.4°C
32	Q4	53.5°C	88.2°C
33	C42	43.2°C	76.6°C
34	T1core	56.4°C	87.0°C
35	T1coil	93.4°C	98.0°C
36	C108	43.5°C	79.0°C
37	U9	49.1°C	82.7°C
38	U2	47.2°C	81.7°C
39	R7	47.9°C	81.5°C
40	C92	48.0°C	82.3°C
41	U5	48.1°C	81.8°C
42	U101	53.5°C	87.6°C
43	Q100	54.2°C	88.8°C
44	Q104	56.2°C	91.1°C
45	J101	47.6°C	80.7°C
46	D13	40.2°C	73.9°C
47	U104	35.9°C	69.1°C
48	RTH5	54.9°C	89.1°C
49	C107	45.5°C	80.7°C
50	C110	43.2°C	76.5°C
51	C135	38.5°C	70.7°C
52	U100	45.4°C	80.9°C
53	U7	41.4°C	75.2°C
54	RTH3	39.0°C	73.3°C
55	T2	40.4°C	74.4°C
56	C158	33.1°C	67.1°C
57	C201	39.3°C	74.1°C
58	U111	39.6°C	73.7°C
59	Q5	41.9°C	75.9°C
60	U100	42.3°C	76.2°C



2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 114%LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 80%/100%LOAD Ta= -45°C/-35°C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C/95 %R.H NO DAMAGE	I/P : 315VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.05%/°C(0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.005%/°C(0~60°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-30~60°C	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60°C LIFE TIME	(1) 937548HRS (2) 72642HRS (3) 125350HRS (4) 189547HRS	
10	MTBF	Conducted by Parts Stress Analysis Prediction 1047.1K hrs min. Telcordia SR-332 (Bellcore) ; 137.4K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangzd

2020.10.1 TAG-QA-009